


Reference Chart for Standard Margo Grout Plug/Packer Sizes

River Rock Industries can make any size you need!

All components are made in our shop.

Including: Rubber bushings, washers, and pipe threading.

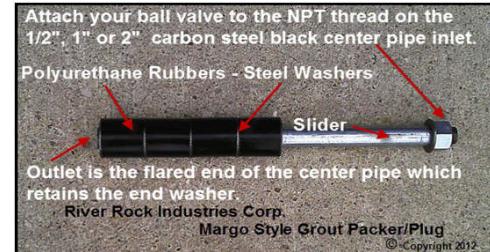

River Rock Model Number	Actual Drill Hole Diameter		Actual Plug Size (inches) OD	Inlet (center) Pipe Size (SCH40, can also be made using SCH80) This is also the NPT Thread Size for the ball valve etc.	Model Extension Add-On Suffix for Overall Length of Plug in Inches (e.g. RR187-48)									
	(inches)	(mm)			18	24	36	48	60	72	84	96	108	120
RR087-	1"	25.4	~7/8"	3/8"	■	■	■	■	■	■	■	■	■	■
RR100-	1-1/8"	28.6	1"	1/2"	■	■	■	■	■	■	■	■	■	■
RR112-	1-1/4"	31.8	1-1/8"	1/2"	■	■	■	■	■	■	■	■	■	■
RR125-	1-3/8"	34.9	1-1/4"	1/2"	■	■	■	■	■	■	■	■	■	■
RR137-	1-1/2" EX	38.1	1-3/8"	1/2"	■	■	■	■	■	■	■	■	■	■
RR150-	1-5/8"	41.3	1-1/2"	1/2"	■	■	■	■	■	■	■	■	■	■
RR162-	1-3/4"	44.5	1-5/8"	1/2"	■	■	■	■	■	■	■	■	■	■
RR175-	1-7/8" AQ	47.6	1-3/4"	1/2"	■	■	■	■	■	■	■	■	■	■
RR187-	2"	50.8	1-7/8"	1/2"	■	■	■	■	■	■	■	■	■	■
RR200-	2-1/8"	54	2"	1"	■	■	■	■	■	■	■	■	■	■
RR212-	2-1/4"	57.2	2-1/8"	1"	■	■	■	■	■	■	■	■	■	■
RR225-	2-3/8" BQ	60.3	2-1/4"	1"	■	■	■	■	■	■	■	■	■	■
RR237-	2-1/2"	63.5	2-3/8"	1"	■	■	■	■	■	■	■	■	■	■
RR262-	2-3/4"	69.9	2-5/8"	1"	■	■	■	■	■	■	■	■	■	■
RR287-	3" NQ	76.2	2-7/8"	1"	■	■	■	■	■	■	■	■	■	■
RR312-	3-1/4"	82.6	3-1/8"	2"	■	■	■	■	■	■	■	■	■	■
RR337-	3-1/2"	88.9	3-3/8"	2"	■	■	■	■	■	■	■	■	■	■
RR362-	3-3/4" HQ	96.1	3-5/8"	2"	■	■	■	■	■	■	■	■	■	■
RR387-	4"	101.6	3-7/8"	2"	■	■	■	■	■	■	■	■	■	■
RR412-	4-1/4"	108	4-1/8"	2"	■	■	■	■	■	■	■	■	■	■
RR437-	4-1/2"	114.3	4-3/8"	2"	■	■	■	■	■	■	■	■	■	■
RR462-	4-3/4"	117.35	4-5/8"	2"	■	■	■	■	■	■	■	■	■	■
RR475-	4-7/8"	120.7	4-3/4"	2"	■	■	■	■	■	■	■	■	■	■
RR487-	5"	123.7	4-7/8"	2"	■	■	■	■	■	■	■	■	■	■
RR525-	5-3/8"	133	5-1/4"	2"	■	■	■	■	■	■	■	■	■	■
RR537-	5-1/2"	136.4	5-3/8"	2"	■	■	■	■	■	■	■	■	■	■
RR587-	6"	149	5-7/8"	2"	■	■	■	■	■	■	■	■	■	■

Drill Through Packers --- ASK us for Details

3"

River Rock Industries produces a unique grout plug!

Our Margo style grout plugs come without welding of the outlet end washers. We use a pipe flaring procedure instead!

Constructed using **100% high performance polyurethane rubber sleeves** which are superior to the standard rubber sleeves!

We have the ability to vary the rubber sleeve hardness. Need a softer rubber, no problem!

We can also provide a fully galvanized unit!